

APOLLO

4CCT, WATTAGE SELECTABLE, IP65, PLUG & PLAY BULKHEAD

Apollo bulkhead offers both economy and efficacy all in one! Featuring high efficiency of 135lm/W, Selectable Power 9/12/16W, 4CCT & Plug & play Emergency kit and Microwave sensor with corridor function. Apollo is suitable for indoor or outdoor applications with premium design features such as: matt textured bezel, opal diffuser, IP65 rating, side conduit entry and hinged gear tray with optional black, black eyelid and Chrome bezels.



Features

- Efficacy of 135lm/w
- Plug & Play Emergency and Microwave Sensor
- Selectable CCT & Power
- IP65 & IK08
- Premium Design

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
APOL16W-CCT	Apollo Bulkhead Wht 9/12/16W 4CCT 3/4/5/6K	1250lm 1620lm 2200lm		9W 12W 16W	135 lm/W

Product Information

Warranty	5 Years	Colour Rendition (CRI)	Ra >80
On-Site Warranty	2 Years	Colour Finish	White RAL9003
Colour Appearance (CCT)	3000K 4000K 5000K 6000K	LED Life Expectancy	L80B10 113,000 Hours
IP Rating	IP65	Power Factor	0.9
IK Rating	IK08	Frequency	50/60Hz
Emergency Battery Type	Plug & Play	Driver Type	Power Selectable

Voltage	220-240v
Material (Body/Housing)	Polycarbonate
Material (Diffuser/Cover)	Polycarbonate

Approval	UKCA CE
Electrical Class	Class II
Working Temperature	-20°C to 45°C

BULKHEADS

SPECIFICATION SHEET





APOLLO

4CCT, WATTAGE SELECTABLE, IP65, PLUG & PLAY BULKHEAD

Packaging Information

Dimensions (mm)	Ø: 325 x D: 75 mm
Product Net Weight (kg)	0.78 kg
Barcode	5055807629782
Box Dimensions (mm)	L: 328 x W:328 x D: 79 mm
Box Gross Weight (kg)	0.9 kg

Units/Outer Carton	1
Outer Carton Barcode	15055807629789
Outer Carton Dimensions (mm)	L: 670 x W:425 x D: 340 mm
Outer Carton Gross Weight (kg)	9.81 kg

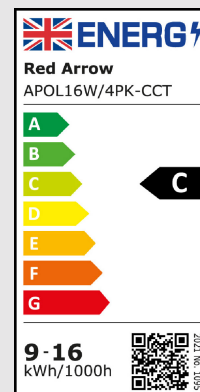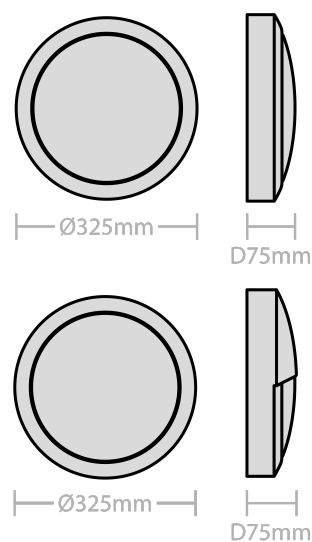

Tel: 0114 279 8999 | Email: sales@redarrowelectrical.co.uk | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF